

## SUPPLEMENTAL SPECIFICATIONS

Description	Change in operating weight kg(lb)	Change in static tipping load-straight kg(lb)	Change in static tipping load-40° kg(lb)
26.5 R25 L3	0	0	0
26.5-25 20PR L3	-328	-410(-905)	-345(-760)
26.5-25 20PR L5	524	+220(+485)	+200(+440)

## HL775-9S BUCKET SELECTION CHART

Loose Material	Material Density
Earth/Clay	1.5~1.7
Sand and Gravel	1.5~1.7
Aggregate	25mm~76mm (1" to 3in)
	19mm (0.75in) and larger

### 26.5 R25 L3

Lift arm	Bucket	Type	m <sup>3</sup>	Material Density [t/m <sup>3</sup> ]																
				0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4
Standard lift arm	General Purpose	Cutting edge	4.4	5.1 m <sup>3</sup>													4.2 m <sup>3</sup>			
		Cutting edge	4.7	5.4 m <sup>3</sup>													4.5 m <sup>3</sup>			
		1-Bolt on tooth	4.2	4.8 m <sup>3</sup>													4.0 m <sup>3</sup>			
		2-Bolt on tooth	4.5	5.2 m <sup>3</sup>													4.3 m <sup>3</sup>			

### 26.5-25 20PR L3

Lift arm	Bucket	Type	m <sup>3</sup>	Material Density [t/m <sup>3</sup> ]																
				0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4
Standard lift arm	General Purpose	Cutting edge	4.4	5.1 m <sup>3</sup>													4.2 m <sup>3</sup>			
		Cutting edge	4.7	5.4 m <sup>3</sup>													4.5 m <sup>3</sup>			
		1-Bolt on tooth	4.2	4.8 m <sup>3</sup>													4.0 m <sup>3</sup>			
		2-Bolt on tooth	4.5	5.2 m <sup>3</sup>													4.3 m <sup>3</sup>			

### 26.5-25 20PR L5

Lift arm	Bucket	Type	m <sup>3</sup>	Material Density [t/m <sup>3</sup> ]																
				0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4
Standard lift arm	General Purpose	Cutting edge	4.4	5.1 m <sup>3</sup>													4.2 m <sup>3</sup>			
		Cutting edge	4.7	5.4 m <sup>3</sup>													4.5 m <sup>3</sup>			
		1-Bolt on tooth	4.2	4.8 m <sup>3</sup>													4.0 m <sup>3</sup>			
		2-Bolt on tooth	4.5	5.2 m <sup>3</sup>													4.3 m <sup>3</sup>			

## STANDARD EQUIPMENT

<p><b>Electrical system</b>                      Alternator, 70A                      Alarms, audible and visual                      - air filter clogging                      - transmission error                      - alternator voltage                      - brake oil pressure                      - engine oil pressure                      - parking brake                      - fuel level                      - hydraulic oil temperature                      - coolant temperature                      - service brake oil pressure                      Alarm, back-up                      Batteries, 1315 CCA, 12V, (2)                      Gauges                      - engine coolant temperature                      - fuel level                      - hydraulic oil temperature                      - speedometer                      - transmission oil temperature                      - voltmeter                      Horn, electric                      Indicator lights                      - clutch cut-off                      - high beam                      - turn signal                      LCD Display                      - clock and fault code                      - operating hour counter</p>	<p>- engine rpm                      - transmission gear range indicator                      - job time and distance                      - temperature(coolant, hydraulic oil, t/m oil)                      Lighting system                      - 1 LED dome light                      - 2 stop and tail lights                      - 4 turn signals                      - brake lights(counterweight)                      - 2 head lights on front tower                      - 2 working lights on front roof                      - 2 working lights on grill                      Switches                      - clutch cut-off                      - hazard                      - ignition key, start/stop switch                      - main light (illumination and head light)                      - parking                      - rear wiper &amp; washer                      - work light                      - battery master switch                      Starter, electric                      Starting and charging system(24-volt)  <b>Bucket</b>                      - 4.5 m<sup>3</sup>, 1 piece tooth, bolt-on type  <b>Cab</b>                      ROPS(ISO 3471) / FOPS(ISO 3449)</p>	<p>(sound suppressed and pressurized) with :                      - cigar lighter                      - coat hook                      Automatic climate control                      - air conditioner &amp; heater                      - defroster                      - intermittent wiper and washer, front and rear                      Personal storage space                      - console box                      - holder, can and cup                      Rear view mirrors (1 inside)                      Rear view mirrors (2 outside)                      2" static seat belt &amp; mechanical suspension seat with armrests                      Steering column, tilt                      Steering wheel with knob                      Roller type sunshade (front window)                      Tinted safety glass                      Two door cab                      Magazine pocket                      Pedals                      - one accelerator pedal                      - one brake pedal                      Radio/USB player                      Rubber floor mat                      Wrist rest  <b>Engine</b></p>	<p>Antifreeze                      Engine, CUMMINS QSM11                      - Low Emission Diesel, Tier3                      Engine enclosure, lockable                      Fuel priming pump                      3 operating mode (power / standard / econo)                      Fan guard                      Fuel/water separator                      Muffler, under hood with large exhaust stack                      Rain cap, engine air intake                      Radiator                      Starting aid (air intake heater)  <b>Power Train</b>                      Brakes : Service, enclosed wet-disc                      Parking brake                      Torque converter                      Transmission, computer-controlled, electronic soft shift, auto-shift and kick-down features included                      Transmission oil cooler  <b>Hydraulics</b>                      Bucket positioner, automatic                      Diagnostic pressure taps                      Hydraulic oil cooler                      Hydraulic system,                      - 2 spool, single lever, pilot control for boom and bucket actuation                      Remote cooling fan,</p>	<p>reversible cooling fan, hydraulically-driven, temperature sensing type  <b>Others</b>                      Articulation locking bar                      Coolant level sight gauge                      Counterweight                      Door and cab locks, one key                      Doors, service access(locking)                      Drawbar with pin                      Engine oil level dipstick gauge                      Ergonomically located and slip resistant, left &amp; right                      - handrails                      - ladders                      - platforms                      - steps                      Fenders (front / rear)                      Hydraulic oil level sight gauge                      Lift and tie-down hooks                      Loader linkage, sealed                      Z-Bar design                      Tires(26.5 R25, L3)                      Transmission oil site level                      Vandalism protection caplocks</p>
--	--	---	--	---

## OPTIONAL EQUIPMENT

<p>24-volt to 12-volt DC converter                      Additional, 4 working lights on front/rear roof                      Bucket                      - 4.2 m<sup>3</sup>, 1 piece tooth, bolt-on type                      - 4.2 m<sup>3</sup>, 1 piece tooth, bolt-on type hook on                      - 4.4 m<sup>3</sup>, Cutting edge, bolt-on type                      - 4.7 m<sup>3</sup>, Cutting edge, bolt-on type                      Beacon light, rotating</p>	<p>Secondary steering system                      Fuel warmer                      Fire extinguisher                      Guard                      - Transmission                      - Crankcase                      3rd spool for auxiliary function                      Extrapping for auxiliary function                      Mud guard                      Heated rear view mirrors (2 outside)</p>	<p>Ride control system                      Seat                      - 2" static seat belt &amp; adjustable mechanical suspension (vinyl)                      - 2" static seat belt &amp; adjustable mechanical suspension (heated)                      - 3" retractable seat belt &amp; adjustable air suspension (heated)                      Steering column, tilt and telescopic                      Roller type sunshade(rear window)</p>	<p>RCV control                      - Finger tip lever - 2 spool                      - Finger tip lever - 3 spool                      - 2 Lever(Joystick) - 3 spool                      Tires :                      - 26.5 - 25, 20PR, L3                      - 26.5 - 25, 20PR, L5                      Tool kit                      Wheel chock                      Pre-cleaner, engine air intake                      License plate &amp; lamp</p>	<p>Hi MATE (Remote Management System)                      - Mobile / Satellite                      Rearview camera                      Limited slip differential                      Quick coupler piping                      Autogrease system</p>
---	--	---	---	--

Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards. All imperial measurements rounded off to the nearest pound or inch.

**HYUNDAI**  
 CONSTRUCTION EQUIPMENT

Head Office (Sales Office)  
 55, BUNDANG-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, KOREA

PLEASE CONTACT

www.hyundai-ce.com

2019. 10 Rev. 3

MOVING YOU FURTHER

# HL775-9S

With Tier 3 Engine installed



\*Photo may include optional equipment.

**HYUNDAI**  
 CONSTRUCTION EQUIPMENT

# Pride at Work

Hyundai Construction Equipment strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. Take pride in your work with Hyundai!

## HL775-9S

### Machine Walk-Around

#### Reliable Main Components

##### Engine Technology

Well proven, reliable, fuel efficient, low noise CUMMINS Tier-III QSM11 engine.  
3 operating mode (Power / Standard / Econo).

##### Fully Automatic Transmission

4 step(Manual / Light / Normal / Heavy) shift mode by working condition  
Protective transmission at low temperature(Automatic warm-up system)  
Self-diagnostic & Memory of malfunction history  
Minimum travel shift shock by applying proportional controlling modulation valve / Self adjusting  
Clutch gap  
Kick-down

##### Axle

Self-adjusting & wheel speed wet disc brake

#### Improved Durability

Long-life cooling system, designed for additional durability, resistant to thermal shock, impulse and vibration.

#### Enhanced Operator Comfort

##### Improved Visibility

Larger operator's cab for additional comfort.  
Redesigned cab with rounded front glass and larger door glass for a larger field of view.

##### Improved Convenience

Increased cooling & heating capacity with fully automatic climate control system.  
Tilting & telescopic steering column.  
Adjustable wrist rest for reduced operating stress.  
Multiple storage compartments.  
AM/FM Radio with MP3 interface and USB input.  
Improved ladder with 20 Degree incline and large, deep tread, non-slip for safer access and exit from the cab.

##### Advanced 5.7" Color Monitor

Easy-to-read new color LCD display.  
Self diagnostic & monitoring system with active display of hydraulic system, transmission and electrical component information.  
Color, rear-view, back-up camera for improved safety and convenience.

#### Serviceability


Reversible, swing-out, cooling fan for easy service and improved cooler maintenance.  
Ground level access to critical service points, filters and sight gauges for easy maintenance.



\*Photo may include optional equipment.

# Operator Comfort

Operating a 9S series wheel loader is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.

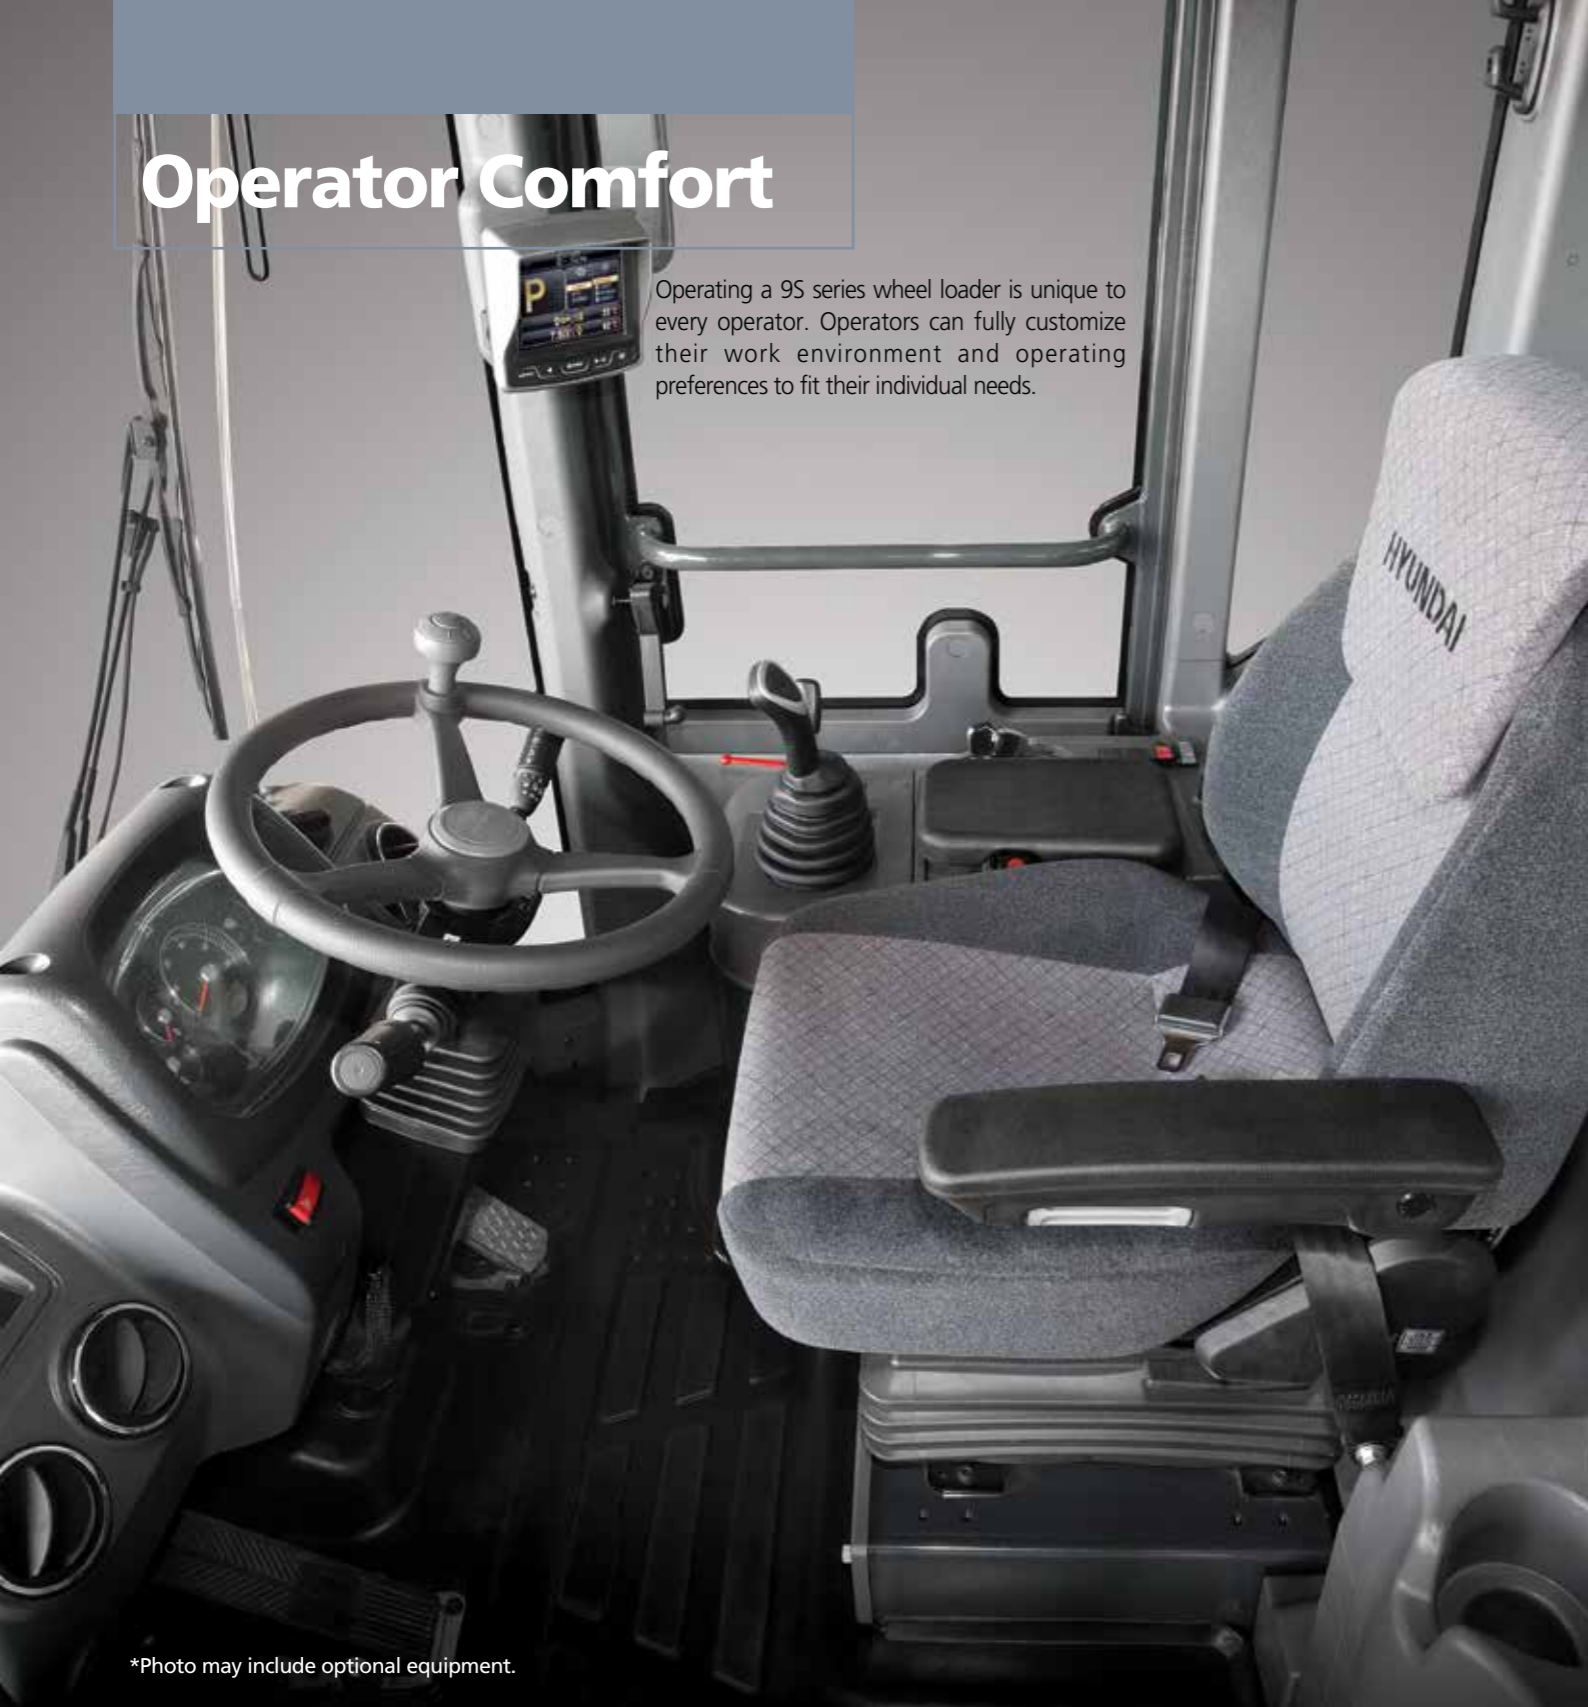

\*Photo may include optional equipment.




## Wide and Convenient Cab

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. The front glass is rounded and 17% wider than the previous 7A series. Special attention was given to a clean, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of cab ergonomics puts the operator in the perfect position to work safely and securely. The 9S series cab's fully automatic climate control system features 11 air vents and increased cooling and heating capacity for optimum temperature control. The defroster vents located on the front and rear windows and a PTC (electric pre-heater, Option) make working in cold weather more hospitable.

## Operator Comfort

In the 9S series cabin you can easily adjust the steering column and wrist rest to best suit your preferred comfort level. Pilot-operated joystick controls are easy and comfortable to operate. Roller type sunshades on the front window allow the operator to reduce glare and improve visibility. Heated side mirrors feature built-in hot wires for quick defrosting during cold weather conditions.

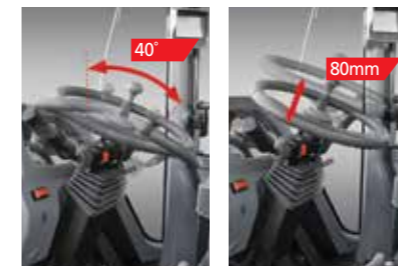

Tilting / telescopic steering column(OPT)



Wrist rest      Joystick lever      Front sunshade      Side mirrors      AM/FM Radio with MP3/ AC control

## Reduced Stress


Work is stressful enough. Your work environment should be stress free. Hyundai's 9S series cabin offers lots of amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with AM/FM stereo with MP3 interface and USB input, plus remotely located controls is perfect for listening to music favorites.

## Advanced Color Monitor



The advanced new monitor with 5.7 inch wide color LCD screen allows the operator to easily and efficiently control the machine. Self diagnostics, color rear-view camera maintenance check lists and start-up machine security, were integrated into the monitor to make the machine more versatile and the operator more productive. The new monitor display unit is mounted on an adjustable swivel mount to reduce glare and position according to operator preference.

## Monitor Tilt Range

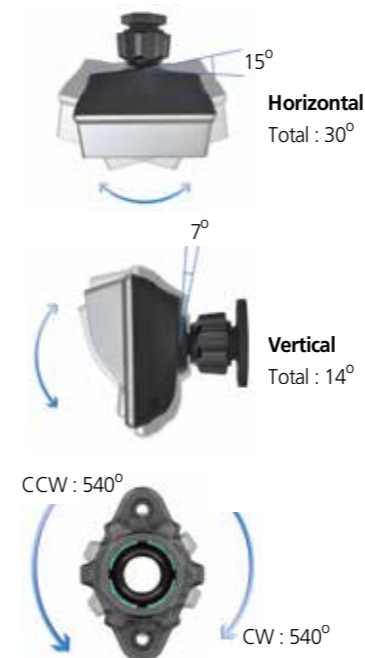

# Precision & Performance

Innovative hydraulic system technologies make the 9S series wheel loader fast, smooth and easy to control. 9S series wheel loaders are designed for maximum performance to keep the operator working productively.



\*Photo may include optional equipment.

## Improved Durability & Reliability



An enhanced axle improves driving over variable ground conditions. Self adjusting brakes that automatically regulate disc clearance, reduce service time and improve brake reliability and performance. Service and clean-out are easier on the 9S series, now equipped with a completely redesigned, parallel-mounted, cooler configuration and non louvered fins to prevent clogging. All coolers are designed with aluminum bar plate configuration and undergo strict factory tests for thermal shock, impulse and vibration to assure long term durability. Top mounted non-louvered aluminum air condenser and variable displacement A/C compressor are designed for maximum cooling capacity, energy savings and easy clean-out.

## Variable Operating Modes



9S series wheel loaders are designed to allow the operator to customize automatic transmission shift timing and clutch cut-off activation based on the job condition and personal operator preference. Convenient rotary type switches allow for easy adjustment of transmission power shift mode, and clutch cut-off mode. Additionally, if equipped with the optional ride control system, the operator has the option to turn the system on or off with an overhead switch. The ride control system has a shock absorbing accumulator that cushions the boom, improves operator comfort and reduces material loss. The versatility of the 9S series operating modes contributes to improved productivity, enhanced operator comfort and reduced fuel consumption.



**3 Mode Engine Power Selection**  
 P(Power) Mode : Heavy duty work  
 S(Standard) Mode : General work  
 E(Economy) Mode : Light duty work

**4 Mode Transmission Power Shift System**

M(Manual) Mode  
 Auto L(Light) Mode : Light duty & long distance carry  
 Auto N(Normal) Mode : General excavating & loading  
 Auto H(Heavy) Mode : Heavy duty excavating & loading

**3 Mode Clutch Cut-Off System**

L(Low) Mode : Short distance & faster loading  
 M(Medium) Mode : General loading  
 H(High) Mode : Slope ground



Eco-friendly  
 Cummins QSM11 Engine

The CUMMINS QSM11 electronic control engine combines full-authority electronic controls with the reliable performance. The combination of improved airflow and evenly dispersed fuel results in increased power, improved transient response and reduced fuel consumption. And the QSM11 uses advanced electronic controls to meet the emission standards. (EPA Tier-3, EU StageIII-A)



Fully Automatic  
 Transmission

Fully automatic transmission designed for maximum durability, minimum power loss, improved travel speed and low noise. Improved clutch control and minimized shifting shock when traveling, contribute to a smoother ride. Error messages and transmission fault history are recorded and accessible through the monitor.

# Profitability

9S series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



\*Photo may include optional equipment.



## Hi-MATE (Remote Management System)

Hi-MATE, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-MATE saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.



## Remote-mounted Cooling Fan

The remote mounted, hydraulically powered cooling fan regulates fan speed according to working temperatures for coolant, intake air, transmission oil and hydraulic oil. This new fan design contributes to reduced fuel consumption and machine noise. (The fan is designed to auto reverse periodically or manually reverse to keep debris from accumulating on the coolers)



## Easy Access

The engine fan is integrated into the rear door which swings open to over 45 degrees for easy access and regular maintenance. Conveniently located coolant and transmission oil site gauges make checking fluid levels fast and efficient. Ground-line access to fuel and oil filters grease fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9S series.



## Full Fenders and Mud Guards (Option)

9S series wheel loaders can be equipped with optional full rear mudguards to reduce material splatter to the cab and machine frame.



Hydraulic Oil  
(5,000 hr)

## Extended Life Components

The 9S series is designed for longer lubrication intervals and extended component life. Hydraulic oil can last up to 5,000 hours before changing. Also, a new center pivot roller bearing design, now double tapered, requires less maintenance as well. Long life and extended wear components save the operator time and money.

# Specifications & Dimensions

## ENGINE

<b>Maker/Model</b>	CUMMINS QSM11
<b>Type</b>	Watercooled, 4-cycle, turbocharged, charge aircooled direct injection, electronic controlled diesel engine
<b>Gross power</b>	300HP (224kW) / 2,000rpm
<b>Net power</b>	285HP (213kW) / 2,000rpm
<b>Max. power</b>	343HP (256kW) / 1,800rpm
<b>Maximum torque</b>	161kg·m (1,165lb-ft) / 1,400rpm
<b>No. of cylinders</b>	6

<b>Bore x Stroke</b>	125mm(4.92") x 147mm(5.79")
<b>Displacement</b>	10.8L (659 cu in)
<b>Compression ratio</b>	16.3 : 1
<b>Air cleaner</b>	Dry, two stage dual elements
<b>Alternator</b>	24V, 70 Amp
<b>Battery</b>	2x12V,220Ah
<b>Starting motor</b>	24V, 7.8 kW

※No derating for continuous operating required up to 3,048m(10,000ft). This engine meets the EPA(Tier III) / EU(Stage III-A) Emission regulation.

## TRANSMISSION

<b>Torque converter type</b>	3-elements, single-stage single-phase
<b>Tire</b>	26.5 R25, L3

※ Full automatic power shift, countershaft type with soft-shift in range and direction. Properly matched torque converter to engine and transmission for excellent working ability

<b>Travel speed</b>		<b>km/h (mph)</b>
<b>Forward</b>	1st	7.0(4.3)
	2nd	12.3(7.6)
	3rd	25.8(16.0)
	4th	37.0(23.0)
<b>Reverse</b>	1st	7.0(4.3)
	2nd	12.3(7.6)
	3rd	25.8(16.0)

## AXLES

<b>Drive system</b>	Four-wheel drive system
<b>Mount</b>	Rigid front axle and oscillating rear axle
<b>Rear axle oscillation</b>	±11° (total 22°)

<b>Hub reduction</b>	Planetary reduction at wheel end
<b>Differential</b>	Conventional
<b>Reduction ratio</b>	23.334

## HYDRAULIC SYSTEM

<b>Type</b>	Open-centered, tandem circuit system
<b>Pump</b>	Fixed Gear type, 434 liters/min (114.6 gal/min)@gal/min
<b>Control valve</b>	2 Spool (Bucket, Boom) 3 Spool (Bucket, Boom, Aux) Pilot pressure controlled type
<b>System pressure</b>	210 kgf/cm <sup>2</sup> (3,046psi)

<b>Bucket Controls</b>	Type	Pilot operated lift and tilt circuit, single-lever(joystick) control standard.
	Lift Circuit	The valve has four functions ; raise, hold, lower and float. Can adjust automatic kickout from horizontal to full lift.
	Tilt Circuit	The valve has three functions ; tilt back, hold and dump. Can adjust automatic bucket positioner to desired load angle.
<b>Cylinder</b>	Type : Double acting No. of cylinders-bore x stroke; 2-180 mm x 765 mm 1-200 mm x 570 mm	
<b>Cycle Time</b>	Raise : 5.9 sec Dump : 1.3 sec Lower : 2.6 sec Total : 9.8 sec	

## BRAKES

<b>Service Brakes</b>	Hydraulically actuated, wet disc brakes actuate all 4 wheels independent axle-by-axle system. Self adjusting & wheel speed brake.
<b>Parking Brake</b>	Spring-applied, hydraulically released brake
<b>Emergency Brake</b>	When brake oil pressure drops, indicator light alerts operator and parking brake automatically applies.

## STEERING SYSTEM

<b>Service Brakes</b>	Hydraulically actuated, wet disc
<b>Pump</b>	Fixed Gear, 282 liters/min (74.5 gal/min)
<b>Relief Valve Setting</b>	210 kg/cm <sup>2</sup> (3,046 psi)
<b>Cylinder</b>	Type Double acting Bore x Stroke 100mm(3.7") x 480mm(18.9")
<b>Steering Angle</b>	40°(each direction)

Features

- Center-point frame articulation.
- Tilt and telescopic steering column.

## SERVICE REFILL CAPACITIES

<b>Fuel tank</b>	362 liters (95.6 USgal)
<b>Cooling system</b>	46 liters (12.2 USgal)
<b>Crankcase</b>	34 liters (9.0 USgal)
<b>Transmission</b>	51 liters (13.5 USgal)

<b>Front axle</b>	42 liters (11.1 USgal)
<b>Rear axle</b>	42 liters (11.1 USgal)
<b>Hydraulic tank</b>	185 liters (48.9 USgal)
<b>Hydraulic system (including tank)</b>	295 liters (77.9 USgal)


## OVERVIEW

Description	UNIT	HL775-9S
Operating weight	kg (lb)	24,100 (53,131)
Bucket capacity	Heaped m <sup>3</sup> (yd <sup>3</sup> )	4.5 (5.9)
	Struck m <sup>3</sup> (yd <sup>3</sup> )	3.8 (5.0)
Breakout force-bucket	kg (lb)	20,200 (44,440)
Tipping load	Straight kg (lb)	19,350 (42,659)
	Full turn kg (lb)	16,730 (36,883)

## TIRES

<b>Type</b>	Tubeless, loader design tires
<b>Standard</b>	26.5 R25, L3
<b>Options include</b>	26.5 - 25, 20PR, L3 26.5 - 25, 20PR, L5

## DIMENSIONS

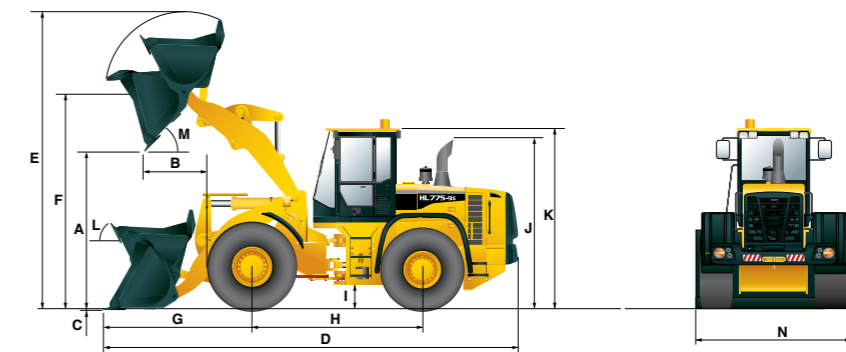

Description	UNIT	HL775-9S
Bucket Type	General purpose bolt-on cutting edge	
A. Dumping clearance at max. height and 45° dump angle	mm (ft-in)	2,915 (9' 6")
B. Reach	Full lift mm (ft-in)	1,415 (4' 7")
	7ft height mm (ft-in)	1,965(6' 5")
C. Digging depth	kg (lb)	125 (0' 4")
D. Overall length	on ground mm (ft-in)	9,190 (30' 1")
	at carry mm (ft-in)	9,020 (29' 7")
E. Overall height (fully raised)	mm (ft-in)	6,005 (19' 8")
F. Bucket pivot max. height	mm (ft-in)	4,305 (14' 1")

Description	UNIT	HL775-9S
G. Front overhang	mm (ft-in)	3,210 (10' 6")
H. Wheelbase	mm (ft-in)	3,500 (11' 5")
I. Ground clearance	mm (ft-in)	480 (1' 7")
J. Height over exhaust	mm (ft-in)	3,550 (11' 8")
K. Height over cab	mm (ft-in)	3,600 (11' 10")
L. Roll-back angle (on ground/at carry)	deg	44 / 48
M. Dump angle	deg	48
Clearance circle	mm (ft-in)	14,595 (47' 10")
K. Overall length	with bucket mm (ft-in)	3,300 (10' 9")
	without bucket mm (ft-in)	2,981 (9' 9")