

STANDARD / OPTION

ENGINE	STD	OPT
Hyundai 6BTAA-5.9 (HM5.9)	●	
HYDRAULIC SYSTEM		
3-power mode, 2-work mode, user mode	●	
Variable power control	●	
Engine auto idle	●	
CAB & INTERIOR		
ISO STANDARD CABIN		
Rise-up type windshield wiper	●	
Radio / USB player		●
12 volt power outlet (24V DC to 12V DC converter)	●	
Electric horn	●	
All-weather steel cab with 360° visibility	●	
Sliding fold-in front window	●	
Sliding side window(LH)	●	
Lockable door	●	
Storage compartment & Ashtray	●	
Sun visor	●	
Door and cab locks, one key	●	
Mechanical suspension seat	●	
Pilot-operated slidable joystick	●	
Cabin lights		●
Cabin roof-steel cover	●	
AUTOMATIC CLIMATE CONTROL		
Air conditioner & heater	●	
Defroster	●	
Starting aid (air grid heater) for cold weather	●	
CENTRALIZED MONITORING		
Engine speed or trip meter / Accel.	●	
Engine coolant temperature gauge	●	
Max power	●	
Low speed / High speed	●	
Auto idle	●	
Air cleaner clogging	●	
Indicators	●	
Fuel level gauge	●	
Hyd. oil temperature gauge	●	
Fuel warmer	●	
Warnings	●	
Communication error	●	
Low battery	●	
Clock	●	
CABIN FOPS (ISO 10262) LEVEL 2		
FOPS (Falling Object Protective Structure)-ISO 10262 Level 2	Front & Tops guard	●

SAFETY	STD	OPT
Battery master switch	●	
Two front working lights (1 boom mounted, 1 front frame mounted)	●	
Travel alarm		●
Beacon lamp		●
Automatic swing brake	●	
Boom holding system	●	
Arm holding system	●	
Two outside rearview mirror	●	
ATTACHMENT		
BOOMS		
5.68m, 18' 8" Mono	●	
5.68m, 18' 8" Heavy Duty		●
8.20m, 26' 11" Long Reach		●
ARMS		
2.00m, 6' 7"		●
2.40m, 7' 10"		●
2.92m, 9' 7"	●	
2.92m, 9' 7" Heavy Duty		●
6.30m, 20' 8"		●
OTHERS		
Removable clean-out dust net for cooler	●	
Removable reservoir tank	●	
Fuel pre-filter	●	
Fuel warmer		●
Self-diagnostics system	●	
Hi MATE (Remote Management System)		●
Batteries (2 x 12V x 100 AH)	●	
Fuel filler pump (35 L/min)		●
Single-acting piping kit (breaker, etc.)		●
Accumulator for lowering work equipment	●	
Tool kit		●
COUNTERWEIGHT		
3.8 ton CWT	●	
4.2 ton CWT		●
5.3 ton CWT		●
UNDERCARRIAGE		
Lower frame under cover (additional)		●
Lower frame under cover (normal)	●	
TRACK SHOES		
Triple grousers shoes (600mm, 24")	●	
Triple grousers shoe (700mm, 28")		●
Triple grousers shoe (800mm, 32")		●
Track rail guard	●	

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.
 The machine may vary according to International standards.
 * The photos may include attachments and optional equipment that are not available in your area.
 * Materials and specifications are subject to change without advance notice.
 * All imperial measurements rounded off to the nearest pound or inch.

Gross Power
148 HP(110 kW) at 2,000rpm

Net Power
145 HP(108 kW) at 2,000rpm

Bucket Capacity
0.52 ~ 1.2m³

Operating Weight
HX210S 20,830 kg / 45,920 lb
HX220S 21,260 kg / 46,870 lb

HX210S HX220S



HYUNDAI CONSTRUCTION EQUIPMENT

Head Office(Sales Office)
3F, Bundang First Tower, 55 Bundang-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13591, Korea

PLEASE CONTACT

WHAT'S NEWEST AND BEST

**HX210S
HX220S**



SUPERIOR PERFORMANCE

- New Variable Power Control
- Hyundai 6BTAA-5.9 (HM5.9)
- Reinforced Bucket and Bucket Linkage
- Powerful and Preciser Swing Control
- Strong and Stable Lower Frame
- Single Layer Cooling System
- Minimization of Shock and Vibration through Cab Mounting System



COMFORTABLE OPERATION

- New Front Side Air-conditioning System
- Smooth Travel Pedal and Foot Rests
- Improved Intelligent Display
- Easy-to-Reach Control Panels
- Wide Cab with Excellent Visibility
- Highly Sensitive Joystick and Easy Entrance
- Wide, Comfortable Operating Space



SERVICEABILITY AND EASY MAINTENANCE

- Easy to Maintain Engine Components
- Centralized Electric Control Box and Easy Change Air Cleaner Assembly
- Side Cover with Left & Right Swing Open Type
- Large tool box for extra storage
- Highly efficient Hydraulic Pump
- Hi-MATE (Remote Management System) **Option**



SUPERIOR PERFORMANCE

A new chapter in construction equipment has begun. Making the dream a reality.



**BUILT FOR
MAXIMUM POWER,
PERFORMANCE, RELIABILITY.**

Hyundai 6BTAA-5.9(HM5.9) Engine



The six cylinders, turbo-charged, 4 cycle, charger air cooled engine is built for power, reliability, economy and low emissions.

Reinforced Bucket and Bucket Linkage



Sealed and adjustable bucket linkage provides less wear of pins and bushes as well as silent operation. The design includes bucket link durability and anti wear characteristics. Additional reinforcement plates on cutting edge section. Reinforced bucket is made with thicker steel and additional lateral plate.

Powerful and Preciser Swing Control



Improved shock absorbing characteristics make stopping a precise and smooth action.

* Photo may include optional equipment.

**A More Reliable
Way To Reach
You Dream.**




The Hyundai 6BTAA-5.9(HM5.9) engine has been designed with 40% fewer parts than the competition. The weight of the machine is reduced without sacrificing strength. You get a proven power plant that meets ecological concerns, without paying a premium for technology you don't need.

Strong and Stable Lower Frame




Reinforced box-section frame welded, low-stress, high-strength steel. guarantees safety and resistance against external impact when driving on rough ground and working on wet sites through high tensile strength steel panels, with highly durable upper and lower rollers and track guards.

Single Layer Cooling System

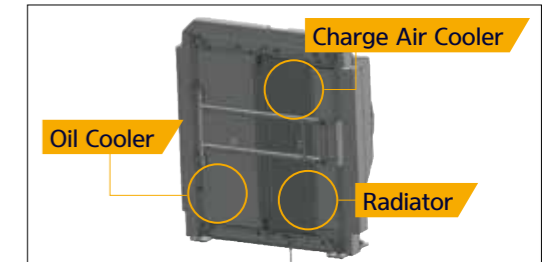

1. Improved cooling performance by changing over to 3 column type structure in a row
2. Easy to clean without disassembling aentire radiator total assembly

Minimization of Shock and Vibration through Cab Mounting System

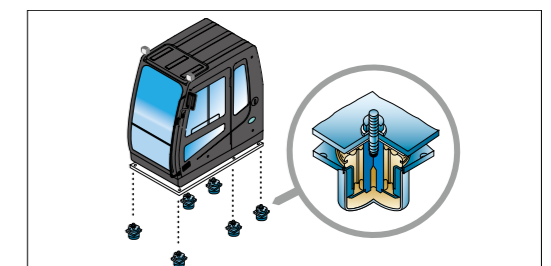

The application of Viscous Mounting to the cabin support provides the operator with a much improved ride. The operator work efficiency will increase as the shock and noise level in the cabin decreases.



COMFORTABLE OPERATION

Many electronic functions are concentrated in the most convenient spot for operators to improve work efficiency. The highly-advanced infotainment system, a product of HCE's intensive information technology development, enables both productivity and comfort while working! The HX Series is designed with the operator in mind.

OPERATOR'S COMFORT FOREMOST. WIDE CAB EXCEEDS INDUSTRY STANDARDS.

Improved Intelligent Display



Instrument Panel is installed in front of RH console box. It is easy to check all critical systems with easy-to-read indicators.

Smooth Travel Pedal and Foot Rests



Easy-to-Reach Control Panels



Switches and other essential controls are located near the operator. This helps keep operator movement to a minimum, enhancing control with less operator fatigue.

Photo may include optional equipment.

Wide Cab with Excellent Visibility



The cab is roomy and ergonomically designed with low noise level and good visibility. A full view front window and large rear and side windows provide excellent visibility in all directions.

Highly Sensitive Joystick and Easy Entrance



New joystick grips for precise control have been equipped with double switches.
- Left: One touch deceleration
- Right: Horn / Optional

Wide, Comfortable Operating Space



All the controls are designed and positioned according to the latest ergonomic research. Reinforced pillars have also been added for greater cab rigidity.



SERVICEABILITY AND EASY MAINTENANCE

New Cabin for More Comfort.

Low noise, low vibration, and ergonomic design make the cabin space more comfortable and pleasant! With focus on safety and convenience of operators, the HX Series allows rapid and safe equipment inspection anytime and anywhere, providing an optimal environment for operators to work.



HiMATE Option

IT'S CONVENIENT, EASY AND VALUABLE

Hi MATE, Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available.

Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

WHAT IS BENEFITS



Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geo-fence boundary, you will get alerts

* Photo may include optional equipment.

Easy to Maintain Engine Components



The cooling system is provided for optimum operation, guaranteeing longer life for the engine and hydraulic components. Servicing of the engine and hydraulics is considerably simplified due to total accessibility.

Centralized Electric Control Box and Easy Change Air Cleaner Assembly



Electric control box and Air cleaner are centralized in one or the same compartment for easy service.

Side Cover with Left & Right Swing Open Type



Easy access to vital components gives unrestricted view of component allows easy maintenance and repair.

SPECIFICATIONS

ENGINE			
Maker / Model		Hyundai 6BTAA-5.9 (HM5.9)	
Type		Water cooled, 4 cycle Diesel, 6-Cylinders in line, direct injection, Turbocharged, charge air cooled, Low emission	
Rated Flywheel Horse Power	SAE	J1995 (gross)	148 HP (110 kW) at 2,000 rpm
		J1349 (net)	145 HP (108 kW) at 2,000 rpm
DIN	6271/1 (gross)		150 PS (110 kW) at 2,000 rpm
	6271/1 (net)		147 PS (108 kW) at 2,000 rpm
Max. Torque		64 kgf · m (463 lbf · ft) at 1,300 rpm	
Bore X Stroke		102 X 120 mm (4" X 4.7")	
Piston Displacement		5,900 cc (360 in ³)	
Batteries		2 X 12 V X 100 Ah	
Starting Motor		24 V, 4.5 kW	
Alternator		24 V, 70 Amp	

HYDRAULIC SYSTEM	
MAIN PUMP	
Type	Variable displacement tandem-axis piston pumps
Max. Flow	2 X 222 ℓ /min (58.6 US gpm / 48.4 UK gpm)
Sub-Pump for Pilot Circuit	Gear pump
Cross-sensing and fuel saving pump system	

HYDRAULIC MOTORS	
Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement Circuits	350 kgf/cm ² (4,978 psi)
Travel	350 kgf/cm ² (4,978 psi)
Swing Circuit	265 kgf/cm ² (3,769 psi)
Pilot Circuit	40 kgf/cm ² (568 psi)
Service Valve	Installed

HYDRAULIC CYLINDERS	
No. of Cylinder	Boom: 2-120 X 1,290 mm (4.7" X 50.8")
Bore X Stroke	Arm: 1-140 X 1,510 mm (5.5" X 59.4") Bucket: 1-120 X 1,055 mm (4.72" X 41.5")

DRIVES & BRAKES	
Drive Method	Fully hydrostatic type
Drive Motor	Axial piston motor, in-shoe design
Reduction System	Planetary reduction gear
Max. Drawbar Pull	21,100 kgf (46,500 lbf)
Max. Travel Speed (high / low)	5.7 km/hr (3.54 mph) / 3.5 km/hr (2.17 mph)
Gradeability	35° (70 %)
Parking Brake	Multi wet disc

CONTROL	
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.	
Pilot Control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Traveling and Steering	Two levers with pedals
Engine Throttle	Electric, Dial type
Lights	One light mounted on the boom and one in the battery box

SWING SYSTEM	
Swing Motor	Fixed displacement axial pistons motor
Swing Reduction	Planetary gear reduction
Swing Bearing lubrication	Grease-bathed
Swing Brake	Multi wet disc
Swing Speed	12.2 rpm

COOLANT & LUBRICANT CAPACITY			
	liter	US gal	UK gal
Fuel Tank	340	89.8	74.8
Engine Coolant	20	5.3	4.4
Engine Oil	24	6.3	5.3
Swing Device	5	1.3	1.1
Final Drive (Each)	6	1.6	1.3
Hydraulic System (Including Tank)	275	72.6	60.5
Hydraulic Tank	160	42.3	35.2

*():option

UNDERCARRIAGE		
The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.		
Model	HX210S	HX220S
Center Frame	X-leg type	X-leg type
Track Frame	Pentagonal box type	Pentagonal box type
No. of Shoes on Each Side	46 EA	49 EA
No. of Carrier Rollers on Each Side	2 EA	2 EA
No. of Track Rollers on Each Side	7 EA	9 EA
No. of Rail Guards on Each Side	1 EA	2 EA

OPERATING WEIGHT (APPROXIMATE)	
Operating weight, including 5,680 mm (18' 8") boom, 2,920 mm (9' 7") arm, SAE heaped 0.92m ³ (1.20 yd ³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.	

MAJOR COMPONENT WEIGHT	
Upperstructure	5,600 kg (12,350 lb)
Counterweight	3,600 kg (7,937 lb)
Boom (with Arm Cylinder)	1,950 kg (4,300 lb)

OPERATING WEIGHT				
Shoes		Operating Weight		Ground Pressure
Type	Width mm (in)	kg (lb)		kgf/cm ² (psi)
Triple Grouser	600 (24")	HX210S	20,830 (45,920)	0.48 (6.81)
		HX220S	21,260 (46,870)	0.45 (6.45)
	700 (28")	HX220S	21,750 (47,950)	0.40 (5.66)
		HX210S	21,380 (47,140)	0.42 (5.99)
	800 (32")	HX220S	22,040 (48,590)	0.35 (5.02)
		HX220S LR	24,390 (53,770)	0.39 (5.55)

BUCKET SELECTION GUIDE & DIGGING FORCE

BUCKETS

All buckets are welded with high-strength steel.



SAE heaped m ³ (yd ³)	0.92 (1.20)	1.10 (1.44)	1.20 (1.57)	0.87 (1.14)	0.90 (1.18)	0.52 (0.68)

Type	Capacity m ³ (yd ³)		Width mm (in)	Weight kg (lb)	Tooth EA	Recommendation mm (ft-in)						
	SAE heaped	CECE heaped				5,680 (18' 8") Boom	5,680 (18' 8") Boom	5,680 (18' 8") Boom	5,680 (18' 8") Boom	5,680 (18' 8") Boom	5,680 (18' 8") Boom	8,200 (26' 11") Boom
						3.6 ton CWT			4.2 ton CWT			5.3 ton CWT
HX210S	0.92 (1.20)	0.80 (1.05)	1,080 (42.5")	725 (1,600)	5	●	●	■	●	●	●	-
	1.10 (1.44)	0.96 (1.26)	1,320 (52.0")	830 (1,830)	5	■	■	▲	●	■	■	-
	1.20 (1.57)	1.00 (1.31)	1,330 (52.4")	810 (1,790)	5	■	▲	▲	●	■	▲	-
	◆ 0.90 (1.18)	0.80 (1.05)	1,080 (42.5")	830 (1,830)	5	●	●	■	●	●	●	-
	◎ 0.87 (1.14)	0.75 (0.98)	1,140 (44.9")	900 (1,980)	5	●	●	■	●	●	●	-
HX220S	1.20 (1.57)	1.00 (1.31)	1,410 (55.5")	1,030 (2,270)	5	■	▲	x	■	■	▲	-
	0.92 (1.20)	0.80 (1.05)	1,080 (42.5")	725 (1,600)	5	●	●	●	●	●	●	-
	1.10 (1.44)	0.96 (1.26)	1,320 (52.0")	830 (1,830)	5	●	●	■	●	●	■	-
	1.20 (1.57)	1.00 (1.31)	1,330 (52.4")	810 (1,790)	5	●	■	▲	●	●	■	-
	◆ 0.90 (1.18)	0.80 (1.05)	1,080 (42.5")	830 (1,830)	5	●	●	●	●	●	●	-
	◎ 0.87 (1.14)	0.75 (0.98)	1,140 (44.9")	900 (1,980)	5	●	●	●	●	●	●	-
	◎ 1.20 (1.57)	1.00 (1.31)	1,410 (55.5")	1,030 (2,270)	5	■	■	▲	●	■	■	-
	★ 0.52 (0.68)	0.45 (0.59)	935 (36.8")	460 (1,010)	5	-	-	-	-	-	-	▲

- ◆ Heavy duty bucket
- ◎ Rock-Heavy duty bucket
- ★ Long reach bucket

- : Applicable for materials with density of 2,100 kg/m³ (3,500 lb/yd³) or less
- : Applicable for materials with density of 1,800 kg/m³ (3,000 lb/yd³) or less
- : Applicable for materials with density of 1,500 kg/m³ (2,500 lb/yd³) or less
- ▲ : Applicable for materials with density of 1,200 kg/m³ (2,000 lb/yd³) or less
- : Not Recommended

ATTACHMENT

5.68 m (18' 8"), 8.20 m (26' 11") Booms and 2.0 m (6' 7"), 2.4m (7' 10"), 2.92 m (9' 7"), 6.3 m (20' 8") Arms are available.


DIGGING FORCE						
Boom	Length	mm (ft.in)	5,680 (18' 8")		8,200 (26' 11")	
	Weight	kg (lb)	1,950 (4,300)		2,350 (5,180)	
Arm	Length	mm (ft.in)	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	6,300 (20' 8")
	Weight	kg (lb)	975 (2,150)	1,045 (2,300)	1,095 (2,410)	1,330 (2,930)
Bucket Digging Force	SAE	kN	133.4 [144.8]	133.4 [144.8]	133.4	72.6
		kgf	13,600 [14,770]	13,600 [14,770]	13,600	7,400
		lbf	29,980 [32,550]	29,980 [32,550]	29,980	16,310
	ISO	kN	152.0 [165.0]	152.0 [165.0]	152.0	83.4
		kgf	15,500 [16,830]	15,500 [16,830]	15,500	8,500
		lbf	34,170 [37,100]	34,170 [37,100]	34,170	18,740
Arm Crowd Force	SAE	kN	144.2 [156.5]	119.6 [129.9]	102.0	49.0
		kgf	14,700 [15,960]	12,200 [13,250]	10,400	5,000
		lbf	32,410 [35,190]	26,900 [29,210]	22,930	11,020
	ISO	kN	151.0 [164.0]	125.5 [136.3]	106.9	50.0
		kgf	15,400 [16,720]	12,800 [13,900]	10,900	5,100
		lbf	33,950 [36,860]	28,220 [30,640]	24,030	11,240

Note: Boom weight includes arm cylinder, piping, and pin
Arm weight includes bucket cylinder, linkage, and pin

DIMENSIONS & WORKING RANGE

HX210S/HX220S DIMENSIONS

5.68 m (18' 8") Boom and 2.0 m (6' 7"), 2.4 m (7' 10"), 2.92 m (9' 7") Arm

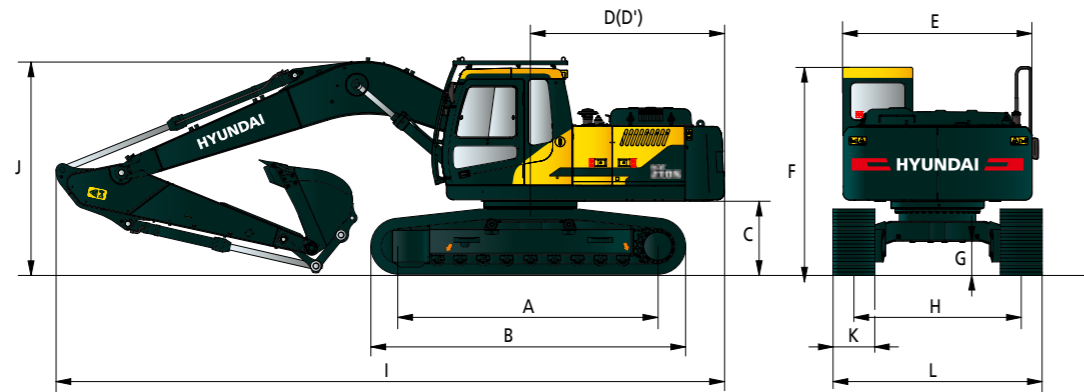

Unit : mm (ft. in)

Model	HX210S	HX220S
A Tumbler Distance	3,360 (11' 0")	3,650 (12' 0")
B Overall Length of Crawler	4,170 (13' 8")	4,440 (14' 7")
C Ground Clearance of Counterweight	1,060 (3' 6")	1,060 (3' 6")
D Tail Swing Radius	2,845 (9' 4")	2,845 (9' 4")
D' Rear-end Length	2,770 (9' 1")	2,770 (9' 1")
E Overall Width of Upperstructure	2,700 (8' 10")	2,700 (8' 10")
F Overall Height of Cab	3,000 (9' 10")	3,000 (9' 10")
G Min. Ground Clearance	470 (1' 7")	470 (1' 7")
H Track Gauge	2,200 (7' 3")	2,390 (7' 10")

Boom length	5,680 (18' 8")		
Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
I Overall Length	9,650 (31' 8")	9,570 (31' 5")	9,530 (31' 3")
J Overall Height of Boom	3,200 (10' 6")	3,110 (10' 2")	3,030 (9' 10")

HX210S


K Track Shoe Width	Type	Triple Grouser	
	Width	600 (24")	800 (32")
L Overall Width	2,800 (9' 2")		3,000 (9' 10")

HX220S

K Track Shoe Width	Type	Triple Grouser		
	Width	600 (24")	700 (28")	800 (32")
L Overall Width	2,990 (9' 10")		3,090 (10' 2")	3,190 (10' 6")

HX220S LONG REACH DIMENSIONS

8.2 m (26' 11") boom, 6.3 m (20' 8") arm

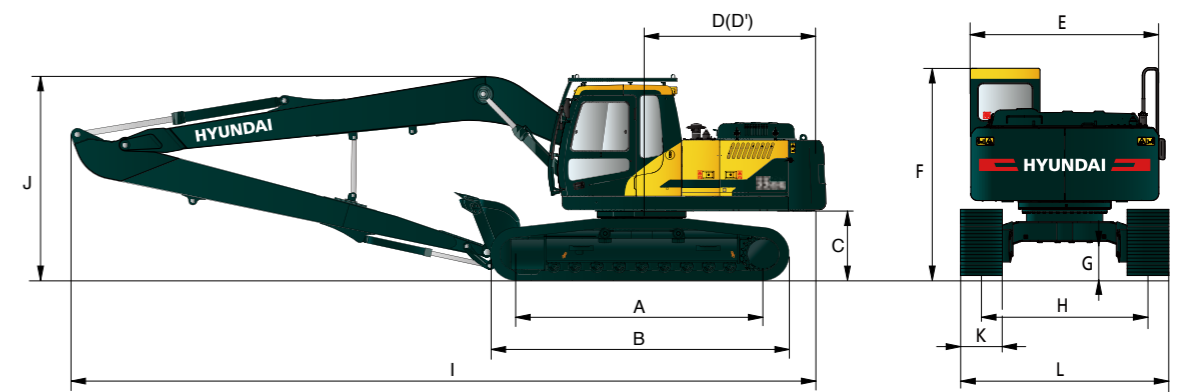


Unit : mm (ft. in)

A Tumbler Distance	3,650 (12' 0")
B Overall Length of Crawler	4,440 (14' 7")
C Ground Clearance of Counterweight	1,060 (3' 6")
D Tail Swing Radius	2,845 (9' 4")
D' Rear-end Length	2,770 (9' 1")
E Overall Width of Upperstructure	2,700 (8' 10")
F Overall Height of Cab	3,000 (9' 10")
G Min. Ground Clearance	470 (1' 7")
H Track Gauge	2,390 (7' 10")

Boom Length	8,200 (26' 11")
Arm Length	6,300 (20' 8")
I Overall Length	12,030 (39' 6")
J Overall Height of Boom	3,280 (10' 9")
K Track Shoe Width	800 (32")
L Overall Width	3,190 (10' 6")


HX210S/HX220S WORKING RANGE

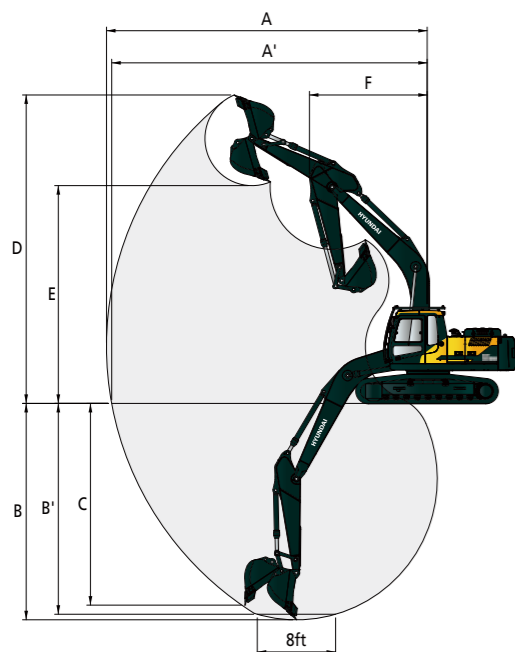

Unit : mm (ft. in)

Model	HX210S	HX220S
Boom Length	5,680 (18' 8")	5,680 (18' 8")
Arm Length	2,920 (9' 7")	2,920 (9' 7")
A Max. Digging Reach	9,980 (32' 9")	9,980 (32' 9")
A' Max. Digging Reach on Ground	9,820 (32' 3")	9,820 (32' 3")
B Max. Digging Depth	6,730 (22' 1")	6,730 (22' 1")
B' Max. Digging Depth (8' Level)	6,560 (21' 6")	6,560 (21' 6")
C Max. Vertical Wall Digging Depth	6,280 (20' 7")	6,280 (20' 7")
D Max. Digging Height	9,600 (31' 6")	9,600 (31' 6")
E Max. Dumping Height	6,780 (22' 3")	6,780 (22' 3")
F Min. Swing Radius	3,740 (12' 3")	3,740 (12' 3")

HX220S LONG REACH WORKING RANGE

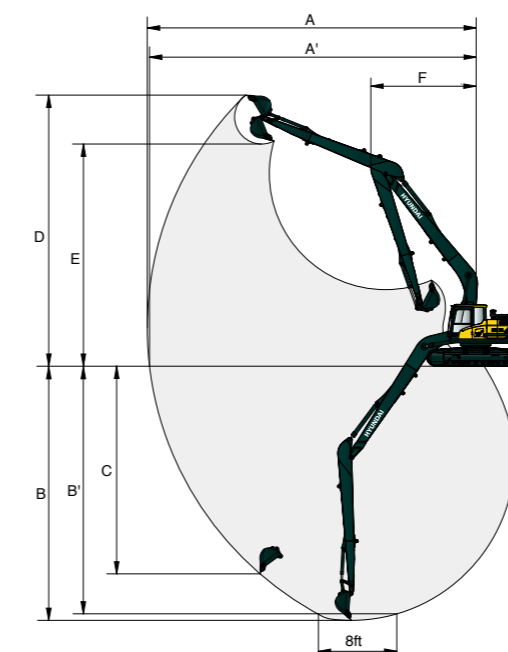

Unit : mm (ft. in)

Boom Length	8,200 (26' 11")
Arm Length	6,300 (20' 8")
A Max. Digging Reach	15,220 (50' 0")
A' Max. Digging Reach on Ground	15,120 (49' 7")
B Max. Digging Depth	11,760 (38' 7")
B' Max. Digging Depth (8' Level)	11,650 (38' 3")
C Max. Vertical Wall Digging Depth	9,610 (31' 6")
D Max. Digging Height	12,550 (41' 2")
E Max. Dumping Height	10,280 (33' 8")
F Min. Swing Radius	4,870 (16' 0")

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX210S DIMENSIONS

5.68 m (18' 8") boom, 2.00 m (6' 7") arm equipped with 600 mm (24") triple grouser shoe and 3,600 kg counter weight

Load Point Height m (ft)	Lift-Point Radius								At Max. Reach		
	3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*5,710 *12,590	*5,710 *12,590	5.00 (16.4)
6.0m 19.7ft	kg lb			*5,450 *12,020	4,330 9,550				*5,520 *12,170	3,920 8,640	6.35 (20.8)
4.5m 14.8ft	kg lb			*6,890 *15,190	6,510 14,350				4,900 10,800	3,170 6,990	7.14 (23.4)
3.0m 9.8ft	kg lb			*8,680 *19,140	5,970 13,160			4,440 9,790	2,860 6,310	4,400 9,700	7.55 (24.8)
1.5m 4.9ft	kg lb					6,040 13,320	3,790 8,360	4,360 9,610	2,780 6,130	4,240 9,350	7.64 (25.1)
0.0m 0.0ft	kg lb			9,190 20,260	5,450 12,020	5,910 13,030	3,670 8,090		4,370 9,630	2,770 6,110	7.43 (24.4)
-1.5m -4.9ft	kg lb			9,210 20,300	5,460 12,040	5,900 13,010	3,660 8,070		4,880 10,760	3,080 6,790	6.88 (22.6)
-3.0m -9.8ft	kg lb	*12,380 *27,290	10,760 23,720	*9,130 *20,130	5,600 12,350				6,190 13,650	3,880 8,550	5.90 (19.4)
-4.5m -14.8ft	kg lb										

5.68 m (18' 8") boom, 2.40 m (7' 10") arm equipped with 600 mm (24") triple grouser shoe and 3,600 kg counter weight

Load Point Height m (ft)	Lift-Point Radius								At Max. Reach		
	3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*5,080 *11,200	4,920 10,850	5.58 (18.3)
6.0m 19.7ft	kg lb			*5,000 *11,020	4,380 9,660				*4,620 *10,190	3,500 7,720	6.82 (22.4)
4.5m 14.8ft	kg lb			*6,340 *13,980	*6,340 *13,980	*5,440 *11,990	4,240 9,350	4,530 9,990	2,930 6,460	4,480 9,880	7.55 (24.8)
3.0m 9.8ft	kg lb			*8,140 *17,950	6,060 13,360	*6,230 *13,730	4,010 8,840	4,450 9,810	2,860 6,310	4,060 8,950	7.94 (26.1)
1.5m 4.9ft	kg lb			9,390 20,700	5,620 12,390	6,040 13,320	3,790 8,360	4,340 9,570	2,760 6,080	3,920 8,640	8.03 (26.3)
0.0m 0.0ft	kg lb			9,160 20,190	5,420 11,950	5,880 12,960	3,650 8,050	4,270 9,410	2,690 5,930	4,020 8,860	7.83 (25.7)
-1.5m -4.9ft	kg lb	*10,830 *23,880	10,370 22,860	9,130 20,130	5,390 11,880	5,840 12,870	3,610 7,960		4,430 9,770	2,790 6,150	7.31 (24.0)
-3.0m -9.8ft	kg lb	*13,260 *29,230	10,570 23,300	9,250 20,390	5,500 12,130	5,930 13,070	3,680 8,110		5,420 11,950	3,400 7,500	6.40 (21.0)
-4.5m -14.8ft	kg lb			*7,160 *15,790	5,790 12,760				*6,330 *13,960	5,180 11,420	4.89 (16.0)

HX220S DIMENSIONS

5.68 m (18' 8") boom, 2.00 m (6' 7") arm equipped with 600 mm (24") triple grouser shoe and 3,600 kg counter weight

Load Point Height m (ft)	Lift-Point Radius								At Max. Reach		
	3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*5,710 *12,590	*5,710 *12,590	5.00 (16.4)
6.0m 19.7ft	kg lb			*5,450 *12,020	4,820 10,630				*5,520 *12,170	4,370 9,630	6.35 (20.8)
4.5m 14.8ft	kg lb			*6,880 *15,170	*6,880 *15,170	*5,800 *12,790	4,690 10,340		5,520 12,170	3,550 7,830	7.14 (23.4)
3.0m 9.8ft	kg lb			*8,680 *19,140	6,730 14,840	*6,530 *14,400	4,470 9,850	5,010 11,050	3,200 7,050	4,960 10,930	7.55 (24.8)
1.5m 4.9ft	kg lb					6,860 15,120	4,270 9,410	4,930 10,870	3,120 6,880	4,800 10,580	7.64 (25.1)
0.0m 0.0ft	kg lb			*10,510 *23,170	6,190 13,650	6,730 14,840	4,150 9,150		4,950 10,910	3,120 6,880	7.43 (24.4)
-1.5m -4.9ft	kg lb			*10,220 *22,530	6,210 13,690	6,720 14,820	4,140 9,130		5,530 12,190	3,470 7,650	6.88 (22.6)
-3.0m -9.8ft	kg lb	*12,380 *27,290	*12,380 *27,290	*9,130 *20,130	6,350 14,000				*6,670 *14,700	4,360 9,610	5.91 (19.4)
-4.5m -14.8ft	kg lb										

1 | Lifting capacity are based on ISO 10567. | 2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. | 3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass). | 4 | (*) indicates load limited by hydraulic capacity.

Rating over-front Rating over-side or 360 degree

HX220S DIMENSIONS

5.68 m (18' 8") boom, 2.40 m (7' 10") arm equipped with 600 mm (24") triple grouser shoe and 3,600 kg counter weight

Load Point Height m (ft)	Lift-Point Radius								At Max. Reach		
	3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*5,080 *11,200	*5,080 *11,200	5.58 (18.3)
6.0m 19.7ft	kg lb			*5,000 *11,020	4,870 10,740				*4,620 *10,190	3,910 8,620	6.81 (22.4)
4.5m 14.8ft	kg lb			*6,340 *13,980	*6,340 *13,980	*5,440 *11,990	4,720 10,410	*4,990 *11,000	3,280 7,230	*4,490 *9,900	7.55 (24.8)
3.0m 9.8ft	kg lb			*8,130 *17,920	6,830 15,060	*6,220 *13,710	4,490 9,900	5,020 11,070	3,200 7,050	*4,580 *10,100	7.94 (26.1)
1.5m 4.9ft	kg lb			*9,700 *21,380	6,370 14,040	6,870 15,150	4,260 9,390	4,910 10,820	3,100 6,830	4,430 9,770	8.03 (26.3)
0.0m 0.0ft	kg lb			*10,400 *22,930	6,170 13,600	6,710 14,790	4,120 9,080	4,840 10,670	3,040 6,700	4,550 10,030	7.83 (25.7)
-1.5m -4.9ft	kg lb	*10,820 *23,850	*10,820 *23,850	*10,330 *22,770	6,140 13,540	6,660 14,680	4,080 8,990		5,020 11,070	3,140 6,920	7.31 (24.0)
-3.0m -9.8ft	kg lb	*13,260 *29,230	12,250 27,010	*9,500 *20,940	6,250 13,780	6,750 14,880	4,160 9,170		6,160 13,580	3,830 8,440	6.41 (21.0)
-4.5m -14.8ft	kg lb			*7,160 *15,790	6,550 14,440				*6,330 *13,960	5,840 12,870	4.89 (16.0)

HX220S LONG REACH DIMENSIONS

8.2 m (26' 11") boom, 6.3 m (20' 8") arm equipped with 800 mm (32") triple grouser shoe, and 5,300 kg (11,690 lb) counterweight.

Load Point Height m (ft)	Lift-Point Radius												At Max. Reach		
	1.5m (4.9ft)	3.0m (9.8ft)	4.5m (14.8ft)	6.0m (19.7ft)	7.5m (24.6ft)	9.0m (29.5ft)	10.5m (34.4ft)	12.0m (39.4ft)	13.5m (44.3ft)	Capacity	Reach				
10.5m 34.4ft	kg lb									*1,210 *2,670	*1,210 *2,670	*900 *1,980	*900 *1,980	10.88 (35.7)	
9.0m 29.5ft	kg lb											*850 *1,870	*850 *1,870	11.94 (39.2)	
7.5m 24.6ft	kg lb									*1,910 *4,210	*1,910 *4,210	*1,440 *3,170	*1,440 *3,170	12.73 (41.8)	
6.0m 19.7ft	kg lb									*2,030 *4,480	*2,030 *4,480	*1,810 *3,990	*1,810 *3,990	13.31 (43.7)	
4.5m 14.8ft	kg lb									*2,330 *5,140	*2,330 *5,140	*2,220 *4,890	*2,220 *4,890	13.70 (45.0)	
3.0m 9.8ft	kg lb									*3,030 *6,680	*3,030 *6,680	*2,680 *5,910	*2,680 *5,910	13.92 (45.7)	
1.5m 4.9ft	kg lb									*2,840 *6,260	*2,840 *6,260	*2,840 *6,260	*2,840 *6,260	13.97 (45.8)	
0.0m 0.0ft	kg lb									*2,450 *5,400	*2,450 *5,400	*2,450 *5,400	*2,450 *5,400	13.85 (45.5)	
-1.5m -4.9ft	kg lb	*2,020 *4,450	*2,020 *4,450	*3,010 *6,640	*3,010 *6,640	*5,640 *12,430	*5,640 *12,430	*5,920 *13,050	4,250 9,370	*4,540 *10,010	*4,540 *10,010	*3,710 *8,180	*3,710 *8,180	13.57 (44.5)	
-3.0m -9.8ft	kg lb	*2,900 *6,390	*2,900 *6,390	*3,830 *8,440	*3,830 *8,440	*6,080 *13,400	*6,080 *13,400	*6,270 *13,820	4,080 8,990	*4,830 *10,650	*4,830 *10,650	3,910 8,620	2,340 5,160	13.11 (43.0)	
-4.5m -14.8ft	kg lb			*4,830 *10,650	*4,830 *10,650	*7,050 *15,540	*7,050 *15,540	*7,050 *15,540	6,110 13,470	*6,400 *14,110	*6,400 *14,110	4,020 8,860	2,950 6,500	3,850 8,490	12.45 (40.9)
-6.0m -19.7ft	kg lb			*4,830 *10,650	*4,830 *10,650	*6,000 *13,230	*6,000 *13,230	*8,460 *18,650	6,210 13,690	*6,300 *13,890	*6,300 *13,890	4,050 8,930	2,950 6,500	3,860 8,510	11.56 (37.9)
-7.5m -24.6ft	kg lb			*5,980 *13,180	*5,980 *13,180	*7,440 *16,400	*7,440 *16,400	*7,880 *17,370	6,400 14,110	*5,940 *13,100	*5,940 *13,100	4,160 9,170	3,030 6,680	*3,780 *8,330	10.37 (34.0)
-9.0m -29.5ft	kg lb					*9,320 *20,550	*9,320 *20,550	*6,820 *15,040	6,700 14,770	*5,210 *11,490	*5,210 *11,490	4,360 9,610	3,200 7,050		8.77 (28.8)
-10.5m -34.4ft	kg lb														

1 | Lifting capacity are based on ISO 10567. | 2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. | 3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass). | 4 | (*) indicates load limited by hydraulic capacity.